

HERITAGE COLUMNS

Promenade

A 4m to 6m period style street lighting column for residential areas, parks or conservation areas. Designed for use in areas where a traditional column is required without a large extra cost. The Promenade column is manufactured from steel with cast aluminium decorations attached. Finish hot dip galvanised and 'MIO' undercoat for final painting on site. Rooted base.



A Promenade conversion kit comprising of a collar, ladder arm, decor ring, cover spigot and base casting is available for upgrading of existing columns.

Column Weight: 4m
5m
6m

Column Options: Traditional brackets
Security lock

Max Wind Area (m²) per Luminaire
at Wind Loading Factor, RWF

	Luminaire Fixing	Max. Weight per luminaire kg	Extra Light 350	Light 396	Medium 429	Heavy 466	Extra Heavy 576
4m Post Top	76mm Ø	40	0.85	0.81	0.74	0.67	0.52
5m Post Top	76mm Ø	40	0.65	0.56	0.50	0.45	0.33
6m Post Top	76mm Ø	40	0.41	0.34	0.30	0.26	0.17

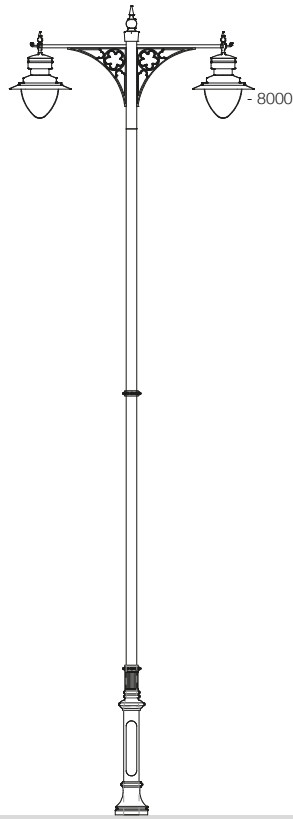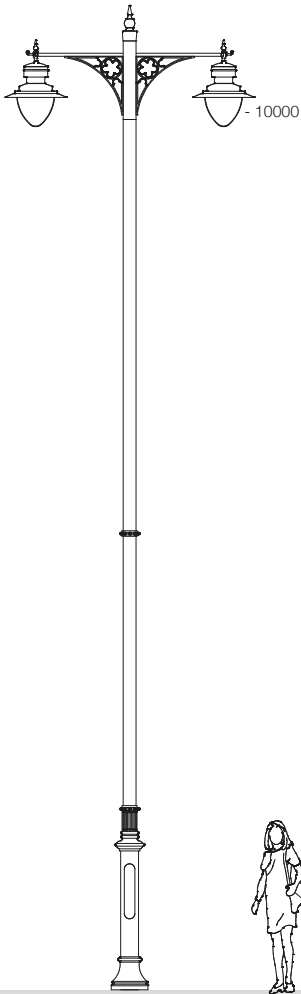

Boulevard

A traditional style 8m or 10m street lighting column for main roads, historic town centres or conservation areas. Designed for use in areas where a traditional column is required without a large extra cost. The Boulevard column is manufactured from steel with cast aluminium decorations attached. Finish hot dip galvanised and 'MIO' undercoat for final painting on site. Rooted base.

Boulevard conversion kit comprising of collar, cover spigot and base casting is available for upgrading of existing columns.

Column Weight: 8m
8m heavy duty
10m heavy duty

Column Options: Traditional brackets
Security lock

Max Wind Area (m²) per Luminaire
at Wind Loading Factor, RWF

			Luminaire Fixing Top Entry	Bracket Number	Max. Weight per luminaire kg	Extra Light 350	Light 396	Medium 429	Heavy 466	Extra Heavy 576
8 metre										
1.0m Single	Arm	Bracket	1" BSP	Y24203311	20	0.51	0.43	0.39	0.34	0.25
1.0m Double	Arm	Bracket	1" BSP	Y2420332	20	0.40	0.34	0.30	0.26	n/a
8 metre heavy duty										
1.0m Double	Arm	Bracket	1" BSP	Y2420332	20	0.50	0.42	0.39	0.34	0.25
10 metre										
1.25m Single	Arm	Bracket	1" BSP	Y2425341	20	0.36	0.31	0.29	0.27	0.26
1.25m Double	Arm	Bracket	1" BSP	Y2425340	20	0.33	0.28	0.27	0.26	0.25